
Blaze Square Light Box 0804 - Hanging

The Blaze™ Square Hanging Structure 0804 mounts to the ceiling and makes the perfect centerpiece of your exhibt, retail space, restaurant or work interior with its easy set up and perfect glow. It gives your brand imaging a unique shine with LED light bars along the perimeter of the frame. The whole structure has dimensions of 8' wide by 8' long and 4' tall. Push fit the SEG fabric graphic into both sides of the frame so your brand can be noticed from multiple directions.

Two backlit graphic material options are available to choose from, Backlit Textile (dye-sublimation printed) and Intensity (UV/LED printed).

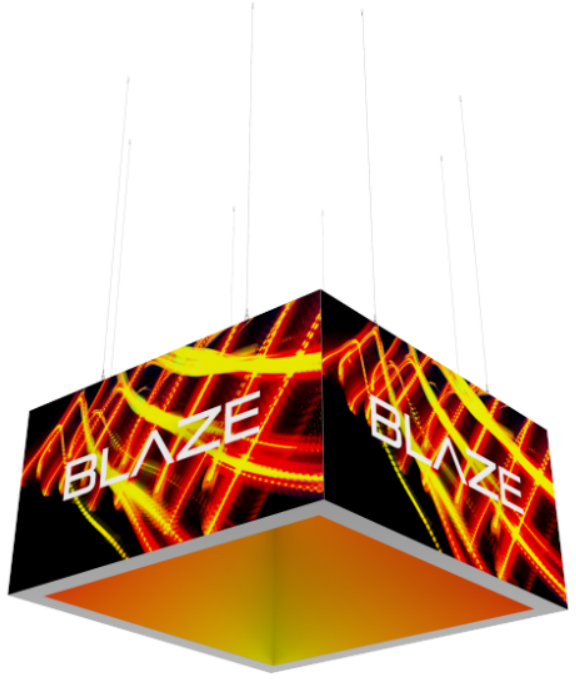

features and benefits:

- 6'' aluminum silver frame
- Perimeter LED light bars attached to the frame feature an internal power supply
- Easy-to-change double-sided SEG push-fit graphics
- Hanging cables included
- UL Certified & ADA compliant sizing; approved for public spaces
- 5 year LED warranty on lights; long life span
- 43,800 hours for 5 years if powered 24/7
- Comes in a box or optional hard case

dimensions:

Hardware

Assembled unit:

96”w x 48”h x 96”d
2438.4mm(w) x 914mm(h) x 2438.4mm(d)

Approximate Weight:
196 lbs / 89 kg

Graphics

Graphic material: Backlit Textile (dye-sublimated fabric)

See graphic templates for graphic sizes.

Refer to related graphic templates for more information Visit:

https://www.theexhibitorshandbook.com/downloads/download-graphic-templates
or click here

Shipping

Packing - 5 Boxes:
Shipping dimensions:
4 x BOX: 54"L x 9"H x 8"D
(1372mm x 229mm x 203mm)
1 x BOX: 48"L x 10"H x 12"D
(1220mm x 254mm x 305mm)

Approximate shipping weight:
216 lbs / 98 kg

Packed in optional OCE2 Case:
Shipping dimensions:
3 x BOX - 17"L x 63"H x 17"D
431.8mm(l) x 1600mm(h) x 431.8mm(d)

Approximate shipping weight:
301 lbs / 136.5 kg

additional information:

Silver finish only



We are continually improving and modifying our product range and reserve the right to vary the specifi cations without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications

Tools Required



MULTI HEX KEY
(INCLUDED)




PHILLIPS SCREW DRIVER
(NOT INCLUDED)





1/2" WRENCH
(NOT INCLUDED)

PART NUMBER	DESCRIPTION	QTY.
343-1187-76-76	343 CORNER EXTRUSION 1187mm	4
360-1219-02-74	1219mm LENGTH OF 360 EXTRUSION WITH (2) IB2 HOLE ONE END AND MITER CUT (2) CB9 HOLE ONE END	4
360-1219-02-75	1219mm LENGTH OF 360 EXTRUSION WITH (2) IB2 HOLE ONE END AND REVERSE MITER CUT (2) CB9 HOLE ONE END	4
360-1219-02-46-75	1219mm LENGTH OF 360 EXTRUSION WITH (2) IB2 HOLES ONE END AND REVERSE MITER CUT WITH (2) CB9 HOLES ONE END, (2) UBOLT HOLES	4
360-1219-02-58-74	1219mm LENGTH OF 360 EXTRUSION WITH (2) IB2 HOLES ONE END AND MITER CUT WITH (2) CB9 HOLES ONE END, (2) UBOLT HOLES, GROMMET HOLE	4
101-1187-01-01-60-PW	1187MM OF PH1 POWDER COAT EXTRUSION WITH CAMLOCKS HOLE AND BLZ BRKT BOTH ENDS	4
343-EC-INNER	ENDCAP 343-INNER	8
343-EC-OUTER	ENDCAP 343 OUTER	8
IB2-0	IB2-0 INLINE CONNECTOR	16
CB9	CB9 CORNER BRACKET	16
LED-EV-WHT-6000-10	10" LED LIGHT FIXTURE	16
LED-EV-WHT-6000-19	19" LED LIGHT FIXTURE	16
LED-EV-THUMB-ORB	THUMB KNOB, ORBUS VERSION, FOR LED LIGHT BAR	64
BLZ-U-BOLT	5/16-18 GRADE 2 min. HARDENED STEEL U-BOLT WITH (4) WASHERS, (2) Medium-Strength Steel Hex Nut, (2) Medium-Strength Steel Nylon-Insert Lock-nut	8
CH-ID-HD-08	INDIVIDUAL CABLE HEAVY DUTY HARNESS WITH 96" LENGTHS 1/8" CABLE	8
1/4-20-BH-SCW-1	1/4-20-SHCS-SCW-1, 18-8 Stainless Steel Button Head Hex Drive Screw	8
1/4-20-WING-NUT	1/4-20-WING-NUT, Zinc-Plated Steel	8
1/4-FENDER-WASHER	92141A030	8
BLZ-BRKT	BLAZE SPREADER BRACKET- Aluminum,white RAL#9003	16
SLIM STL SAFE LOCK	SLIM STEEL, SAFETY CHANNEL LOCK	16
1/4-20-BH-SCW-1/2	1/4-20-SHCS-SCW-.5, 18-8 Stainless Steel Button Head Hex Drive Screw	16

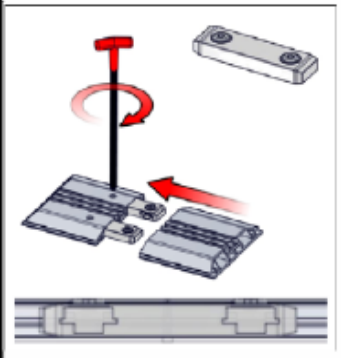



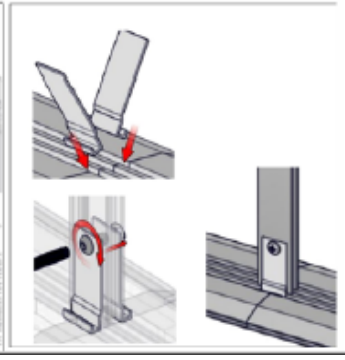


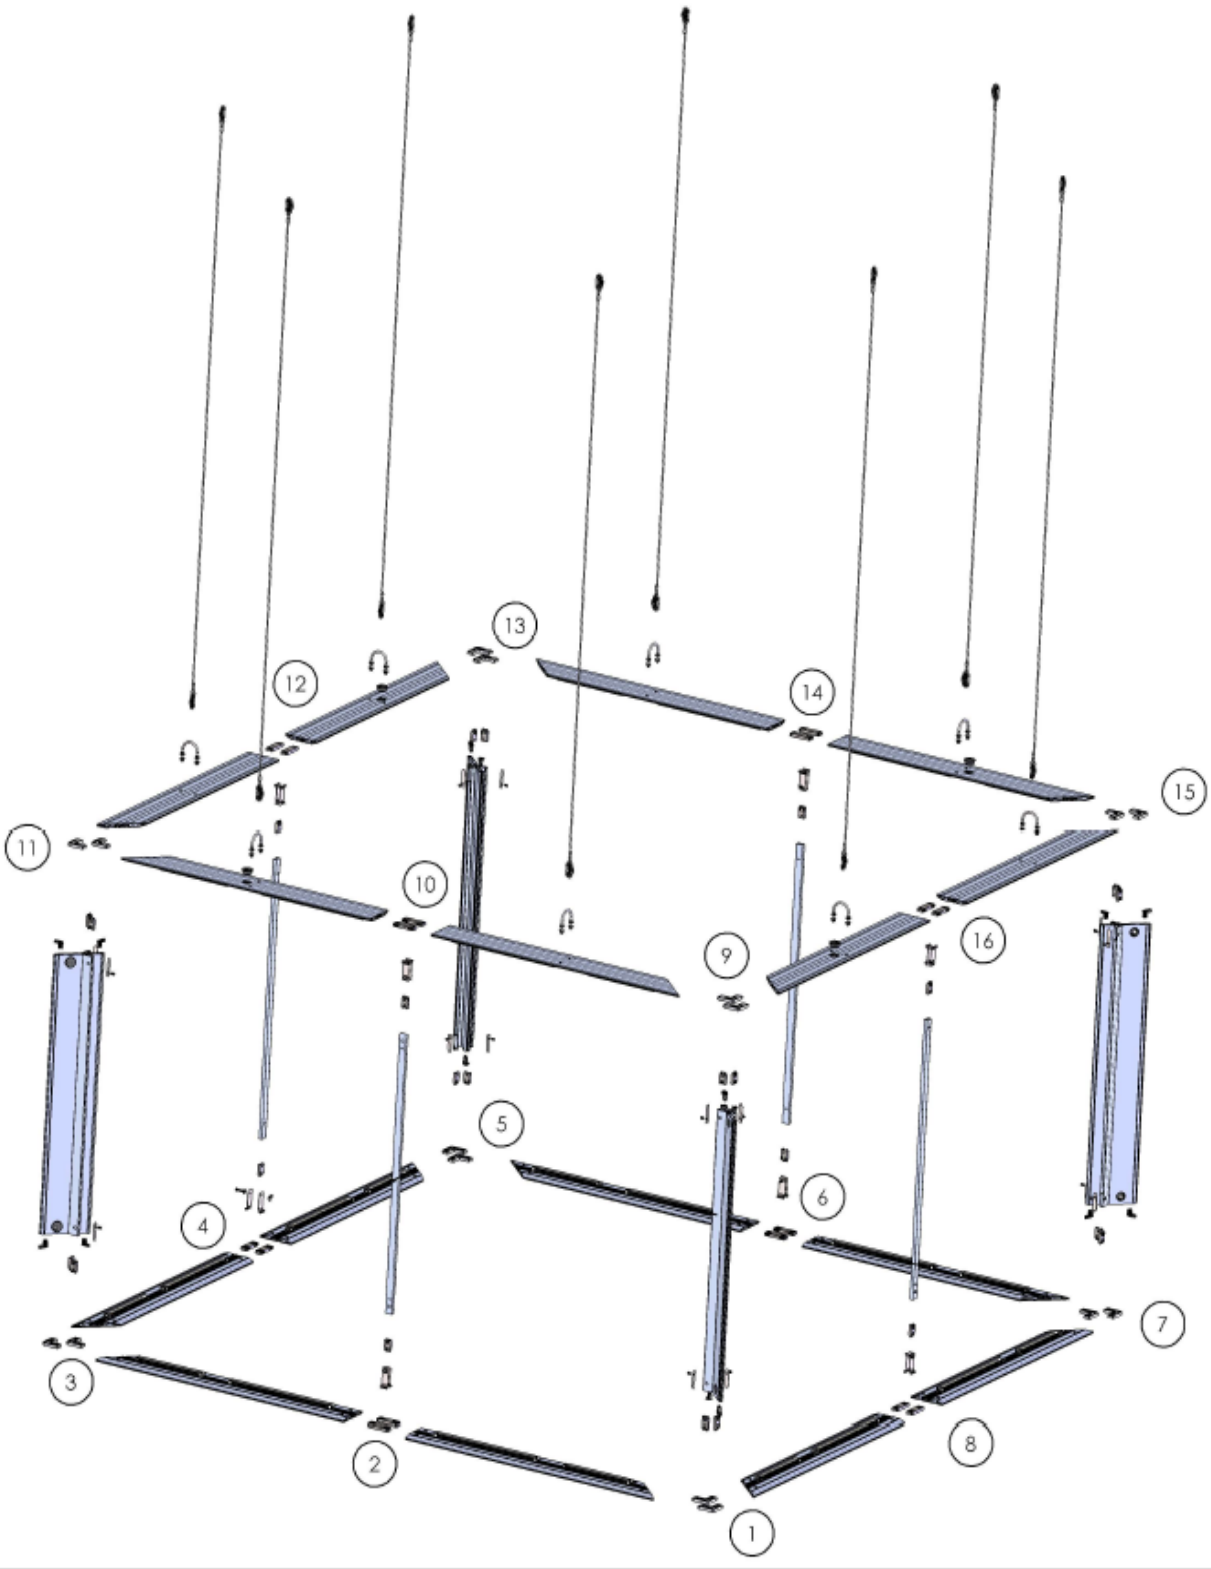

How to Apply & Remove Graphics


Installation and removal of SEG graphics is easy!

Installation: Push the SEG bead into each corner of the frame (1-4) with your thumb, then push the SEG bead into the middle of the run (5-8) and work your way around the perimeter of the frame until all beading is pushed in properly; if necessary, go around the perimeter again to ensure beading is secure in the extrusion profile.

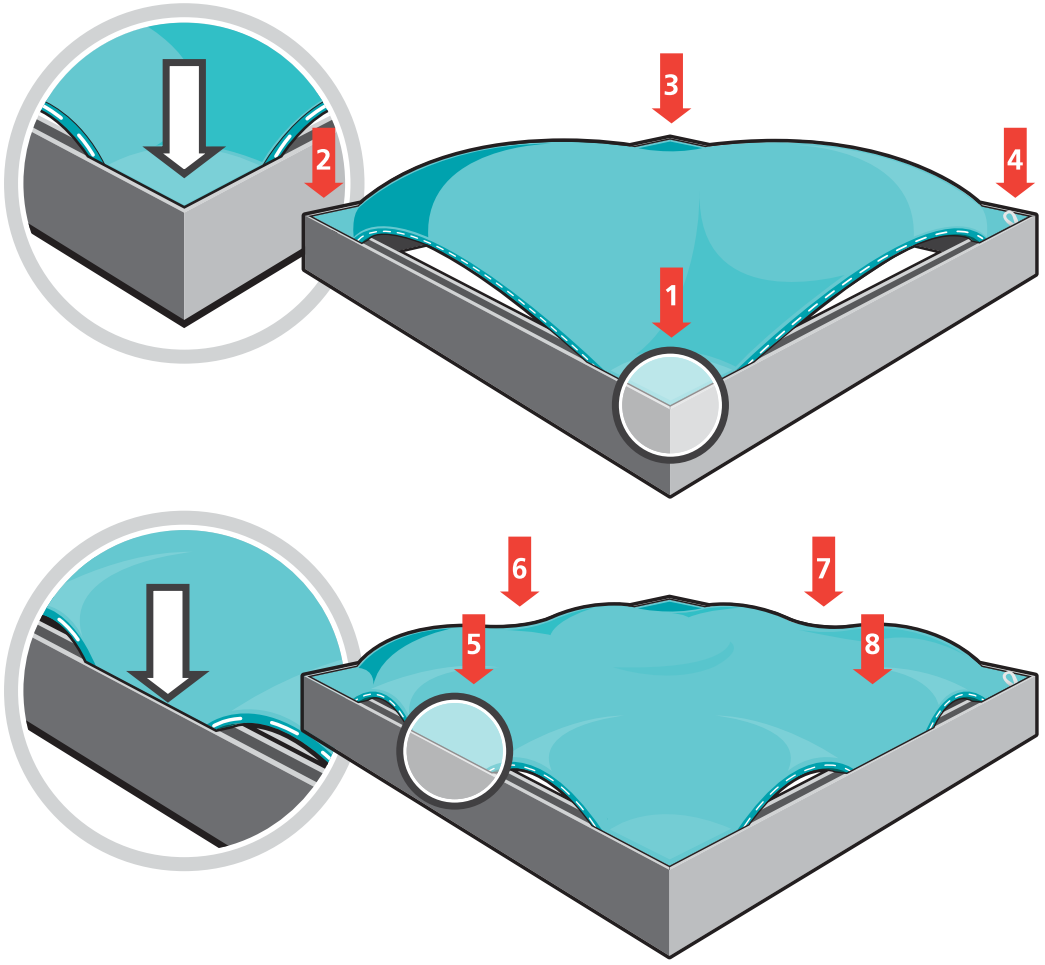

Note: Keep the set up area clean by using a drop cloth, washing hands before set-up or by wearing gloves.

Removal: Use the pull tab located on the graphic and gently pull the graphic from the frame, going around the perimeter.

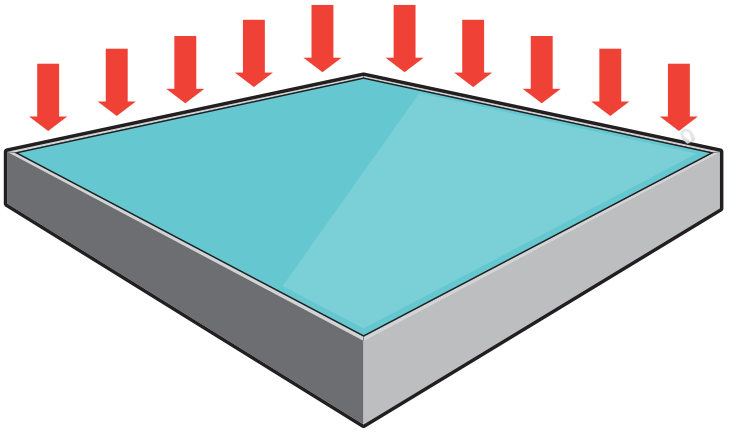

Graphics Storage & Care

Graphics should be folded with the graphic facing inward and stored in a zip lock /sealable plastic bag. Spot clean by wiping with a damp white cloth. If washing is necessary, use a commercial size front-loading washing machine, gentle cycle with cool water. Line dry flat. Dry cleaning is NOT recommended to prevent shrinkage.