Blaze Square Light Box 1604 - Hanging

Bring any exhibit, retail space, restaurant, or workplace interior to life with the stunning Blaze™ Hanging Square 1604. Brand visuals are elevated with seamless double-sided push fit fabrics that are brightened by perimeter LED light bars. Graphics easily attach to the strong aluminum frame, which measures 16' wide by 16' long and 4' tall.

Two backlit graphic material options are available to choose from, Backlit Textile (dye-sublimation printed) and Intensity (UV/LED printed).



features and benefits:

- 6'' aluminum silver frame
- Perimeter LED light bars attached to the frame feature an internal power supply
- Easy-to-change double-sided SEG push-fit graphics
- Hanging cables included
- UL Certified & ADA compliant sizing; approved for public spaces
- 5 year LED warranty on lights; long life span
- 43,800 hours for 5 years if powered 24/7
- Comes in a box or case

dimensions:

Hardware

Assembled unit:

192”w x 48”h x 192”d
4877mm(w) x 914mm(h) x 4877mm(d)

Approximate Weight:
366 lbs / 166 kg

Graphics

Graphic material: Backlit Textile (dye-sublimated fabric)

See graphic templates for graphic sizes.

Refer to related graphic templates for more information Visit:

https://www.theexhibitorshandbook.com/downloads/download-graphic-templates
or click here

Shipping

Packing - 9 Boxes:
Shipping dimensions:
8 x BOX: 54"L x 9"H x 8"D
(1372mm x 229mm x 203mm)
1 x BOX: 24"L x 10"H x 12"D
(610mm x 254mm x 305mm)

Approximate shipping weight:
386 lbs / 175 kg

Packed in optional OCE2 Case:
Shipping dimensions:
5 x BOX: 17"L x 63"H x 17"D
431.8mm(l) x 1600mm(h) x 431.8mm(d)

Approximate shipping weight:
471 lbs / 213.6 kg

additional information:

Silver finish only



We are continually improving and modifying our product range and reserve the right to vary the specifi cations without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications

Tools Required



MULTI HEX KEY
(INCLUDED)





PHILLIPS SCREW DRIVER
(NOT INCLUDED)




1/2" WRENCH
(NOT INCLUDED)


PART NUMBER	DESCRIPTION	QTY.
343-1187-76-76	343 CORNER EXTRUSION 1187mm	4
360-1219-02-74	1219mm LENGTH OF 360 EXTRUSION WITH (2) IB2 HOLE ONE END AND MITER CUT (2) CB9 HOLE ONE END	4
360-1219-02-02	1219mm LENGTH OF 360 EXTRUSION WITH IB2 HOLE BOTH ENDS	8
360-1219-02-75	1219mm LENGTH OF 360 EXTRUSION WITH (2) IB2 HOLE ONE END AND REVERSE MITER CUT (2) CB9 HOLE ONE END	4
360-1219-02-02-46	1219mm LENGTH OF 360 EXTRUSION WITH IB2 HOLE BOTH ENDS , (2) UBOLT HOLES	8
360-1219-02-46-75	1219mm LENGTH OF 360 EXTRUSION WITH (2) IB2 HOLES ONE END AND REVERSE MITER CUT WITH (2) CB9 HOLES ONE END, (2) UBOLT HOLES	4
360-1219-02-58-74	1219mm LENGTH OF 360 EXTRUSION WITH (2) IB2 HOLES ONE END AND MITER CUT WITH (2) CB9 HOLES ONE END, (2) UBOLT HOLES, GROMMET HOLE	4
101-1187-01-01-60-PW	1187MM OF PH1 POWDER COAT EXTRUSION WITH CAMLOCKS HOLE AND BLZ BRKT BOTH ENDS	12
343-EC-INNER	ENDCAP 343-INNER	8
343-EC-OUTER	ENDCAP 343 OUTER	8
IB2-0	IB2-0 INLINE CONNECTOR	48
CB9	CB9 CORNER BRACKET	16
CAM LOCK 2010	CAM LOCK 2010 - CAM LOCK	40
LED-EV-WHT-6000-10	10" LED LIGHT FIXTURE	16
LED-EV-WHT-6000-19	19" LED LIGHT FIXTURE	48
LED-EV-THUMB-ORB	THUMB KNOB, ORBUS VERSION, FOR LED LIGHT BAR	128
BLZ-U-BOLT	5/16-18 GRADE 2 min. HARDENED STEEL U-BOLT WITH (4) WASHERS, (2) Medium-Strength Steel Hex Nut, (2) Medium-Strength Steel Nylon-Insert Lock-nut	16
CH-ID-HD-08	INDIVIDUAL CABLE HEAVY DUTY HARNESS WITH 96" LENGTHS 1/8" CABLE	16
1/4-20-BH-SCW-1	1/4-20-SHCS-SCW-1, 18-8 Stainless Steel Button Head Hex Drive Screw	24
1/4-20-WING-NUT	1/4-20-WING-NUT, Zinc-Plated Steel	24
1/4-FENDER-WASHER	92141A030	24
BLZ-BRKT	BLAZE SPREADER BRACKET- Aluminum,white RAL#9003	48
SLIM STL SAFE LOCK	SLIM STEEL, SAFETY CHANNEL LOCK	16
1/4-20-BH-SCW-1/2	1/4-20-SHCS-SCW-.5, 18-8 Stainless Steel Button Head Hex Drive Screw	16
GROMMET CAP-RNG GRY-1	GRAY CAP & RING FOR 1 1/2" GROMMET	12

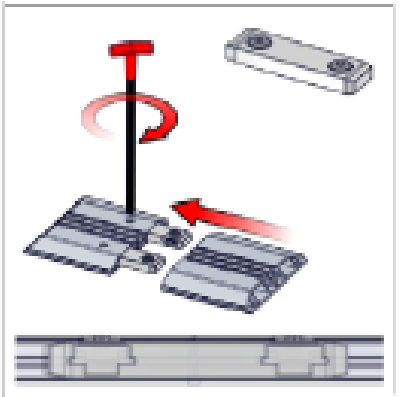

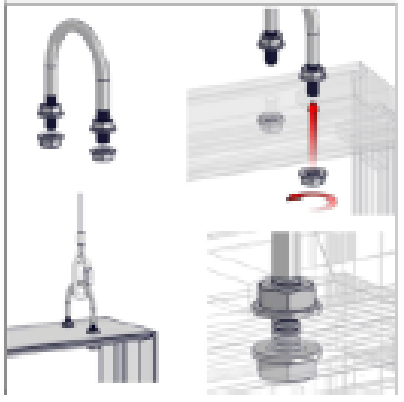

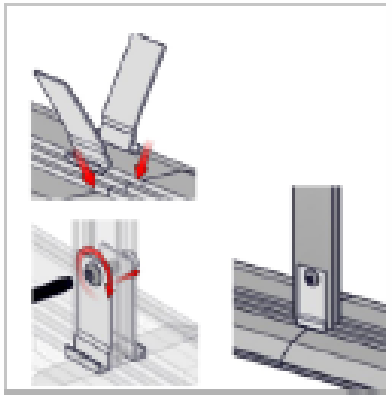


Blaze Square Light Box 1604 - Hanging

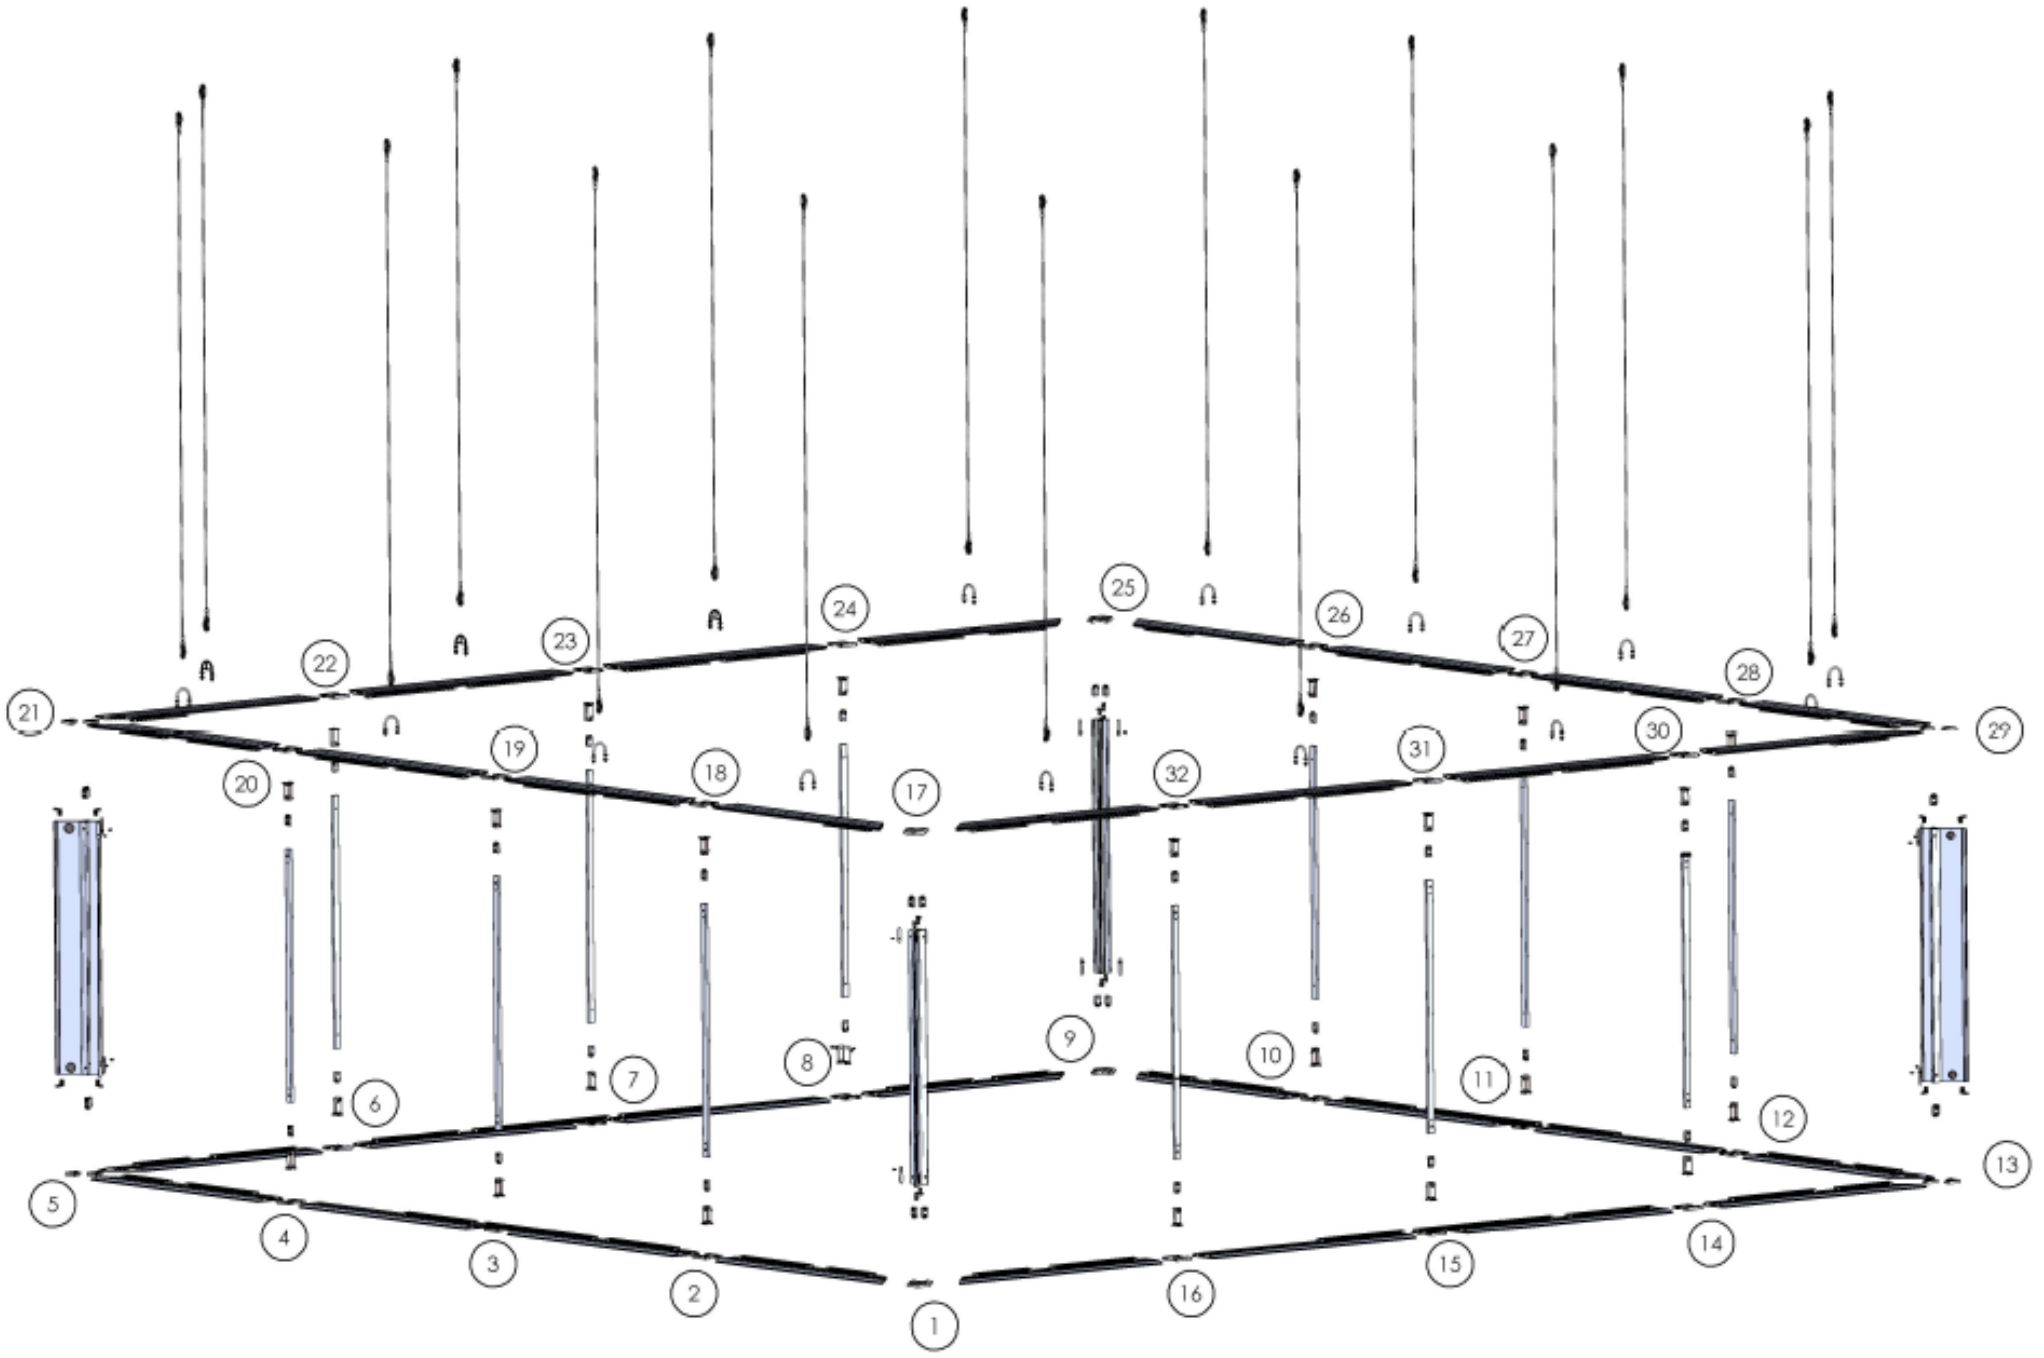

How to Apply & Remove Graphics


Installation and removal of SEG graphics is easy!

Installation: Push the SEG bead into each corner of the frame (1-4) with your thumb, then push the SEG bead into the middle of the run (5-8) and work your way around the perimeter of the frame until all beading is pushed in properly; if necessary, go around the perimeter again to ensure beading is secure in the extrusion profile.

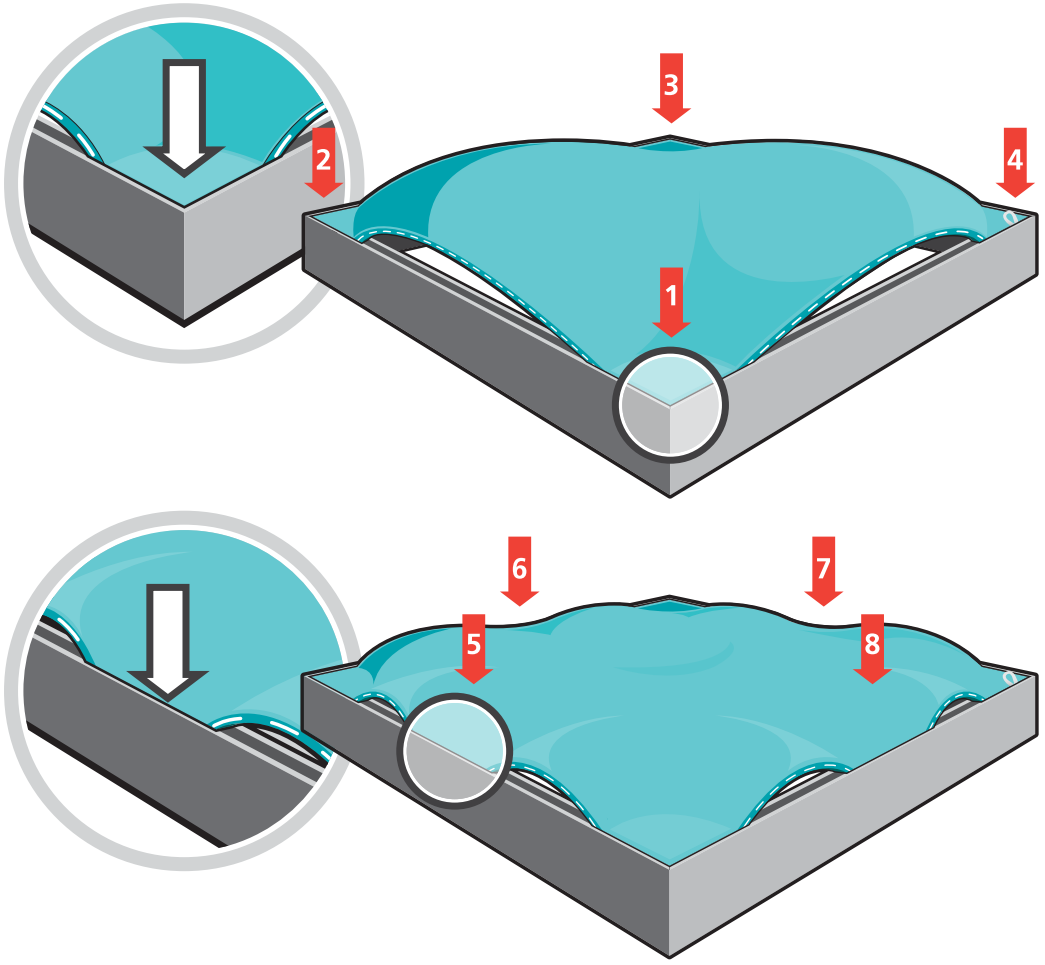

Note: Keep the set up area clean by using a drop cloth, washing hands before set-up or by wearing gloves.

Removal: Use the pull tab located on the graphic and gently pull the graphic from the frame, going around the perimeter.

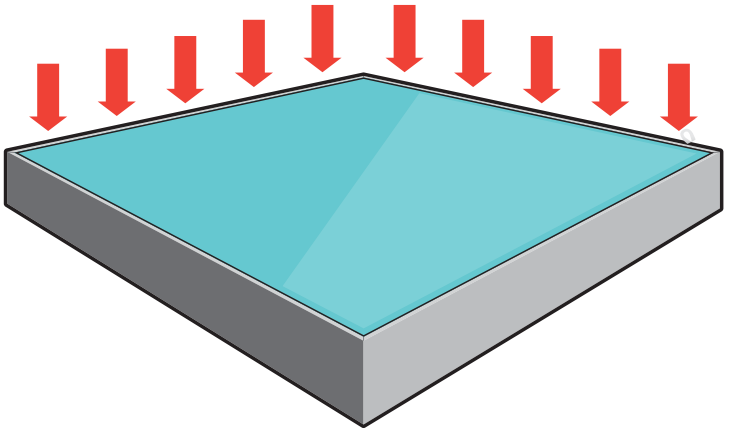

Graphics Storage & Care

Graphics should be folded with the graphic facing inward and stored in a zip lock /sealable plastic bag. Spot clean by wiping with a damp white cloth. If washing is necessary, use a commercial size front-loading washing machine, gentle cycle with cool water. Line dry flat. Dry cleaning is NOT recommended to prevent shrinkage.