# Blaze Light Box 0803 - Hanging

Blaze Hanging Light Box 0803 is 8’w by 3’h, is double sided and features a durable 6” aluminum frame in your choice of Silver, White or Black. Perimeter, interior LED light bars are pre-attached to the frame and make the box GLOW. The light bars include an internal power supply, which means no separate power supplies within the frame, minimizing shadowing and cord management.

Two backlit graphic material options are available to choose from, Backlit Textile (dye-sublimation printed) and Intensity (UV/LED printed).

Backlit Textile is an 8 oz. tightly woven fabric that is slightly stretchy, foldable and washable; it is best for multiple uses. Intensity is a 6.5 oz. material that has a smooth, coated finish. UV printing process allows Intensity to be double struck with ink creating vibrant backlit graphics.




## features and benefits:

- 8'W x 3'H
- 6” light boxes feature a sleek, aluminum frame, available in white, black or silver
- Perimeter LED light bars are pre-attached to the frame
- Light bars feature an internal power supply, which means no separate power supplies within the frame
- Easy to assemble, comes with hanging cables
- UL Certified & ADA compliant sizing, approved for public spaces
- 5 year LED warranty on lights; long life span - 43,800 hours for 5 years if powered 24/7
- Lifetime warranty on frame

## dimensions:

### Hardware

Assembled unit:

96”w x 36”h x 6”d
2438.4mm(w) x 914.4mm(h) x 152.4mm(d)

Approximate Weight:
55 lbs / 24.9 kg

### Graphics

Graphic material: Backlit Textile (dye-sublimated fabric) or Intensity (UV printed)

See graphic templates for graphic sizes.

Refer to related graphic templates for more information Visit:

https://www.theexhibitorshandbook.com/downloads/download-graphic-templates
or click here

### Shipping

**Packing - 3 Boxes:**
Shipping dimensions:
2 x BOXES (55"L x 9"H x 11"D) 1397mm(l) x 228.6mm(h) x 279.4mm(d)
1 x BOX (18"L x 12"H x 4"D) 457.2mm(l) x 304.8mm(h) x 101.6mm(d)


Approximate shipping weight:
81 lbs / 36.741 kg

**Packed in optional OCE2 Case:**
Shipping dimensions:
1 x BOX - 17"L x 57"H x 17"D
431.8mm(l) x 1447.8mm(h) x 431.8mm(d)

Approximate shipping weight:
90 lbs / 40.8 kg

## additional information:

Powder coat color options:




UL CERTIFIED

We are continually improving and modifying our product range and reserve the right to vary the specifi cations without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications

# Tools Required



MULTI HEX KEY
(INCLUDED)



PHILLIPS SCREW DRIVER
(NOT INCLUDED)




1/2" WRENCH
(NOT INCLUDED)

## How to Apply & Remove Graphics


Installation and removal of SEG graphics is easy!

**Installation:** Push the SEG bead into each corner of the frame (1-4) with your thumb, then push the SEG bead into the middle of the run (5-8) and work your way around the perimeter of the frame until all beading is pushed in properly; if necessary, go around the perimeter again to ensure beading is secure in the extrusion profile.

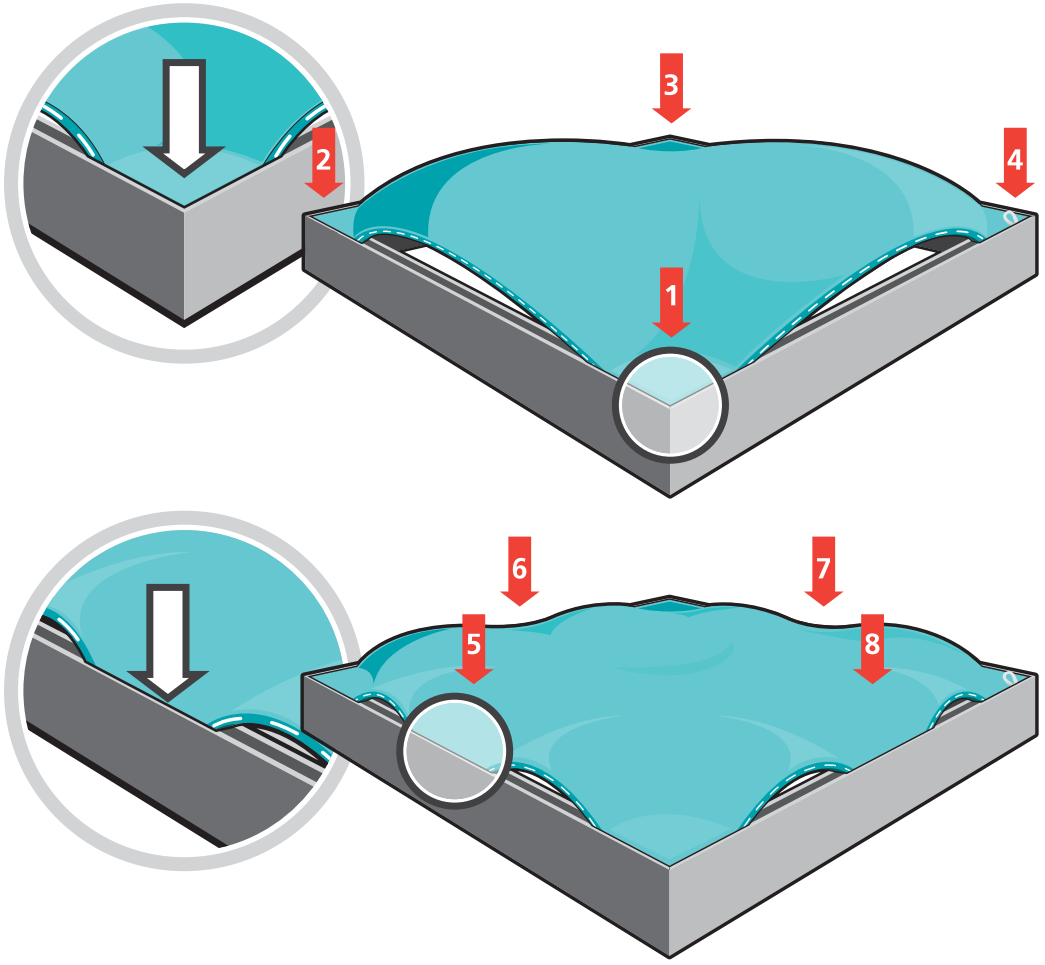


**Note:** Keep the set up area clean by using a drop cloth, washing hands before set-up or by wearing gloves.

**Removal:** Use the pull tab located on the graphic and gently pull the graphic from the frame, going around the perimeter.

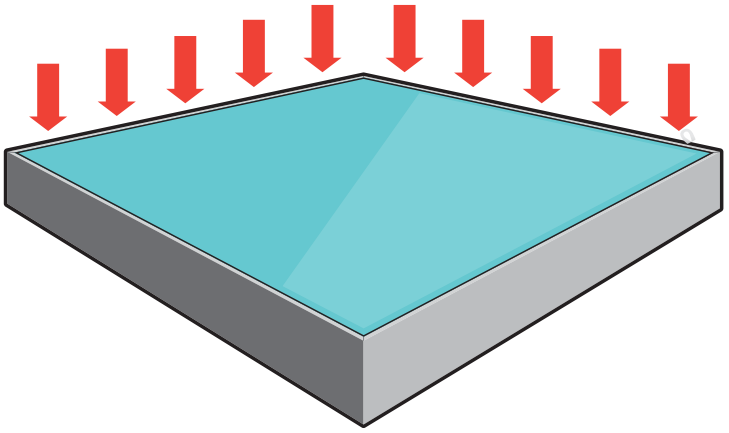


## Graphics Storage & Care

Graphics should be folded with the graphic facing inward and stored in a zip lock /sealable plastic bag. Spot clean by wiping with a damp white cloth. If washing is necessary, use a commercial size front-loading washing machine, gentle cycle with cool water. Line dry flat. Dry cleaning is NOT recommended to prevent shrinkage.

# LED Lights


NOTE: A maximum of 20 LED fixtures can be connected in a line.

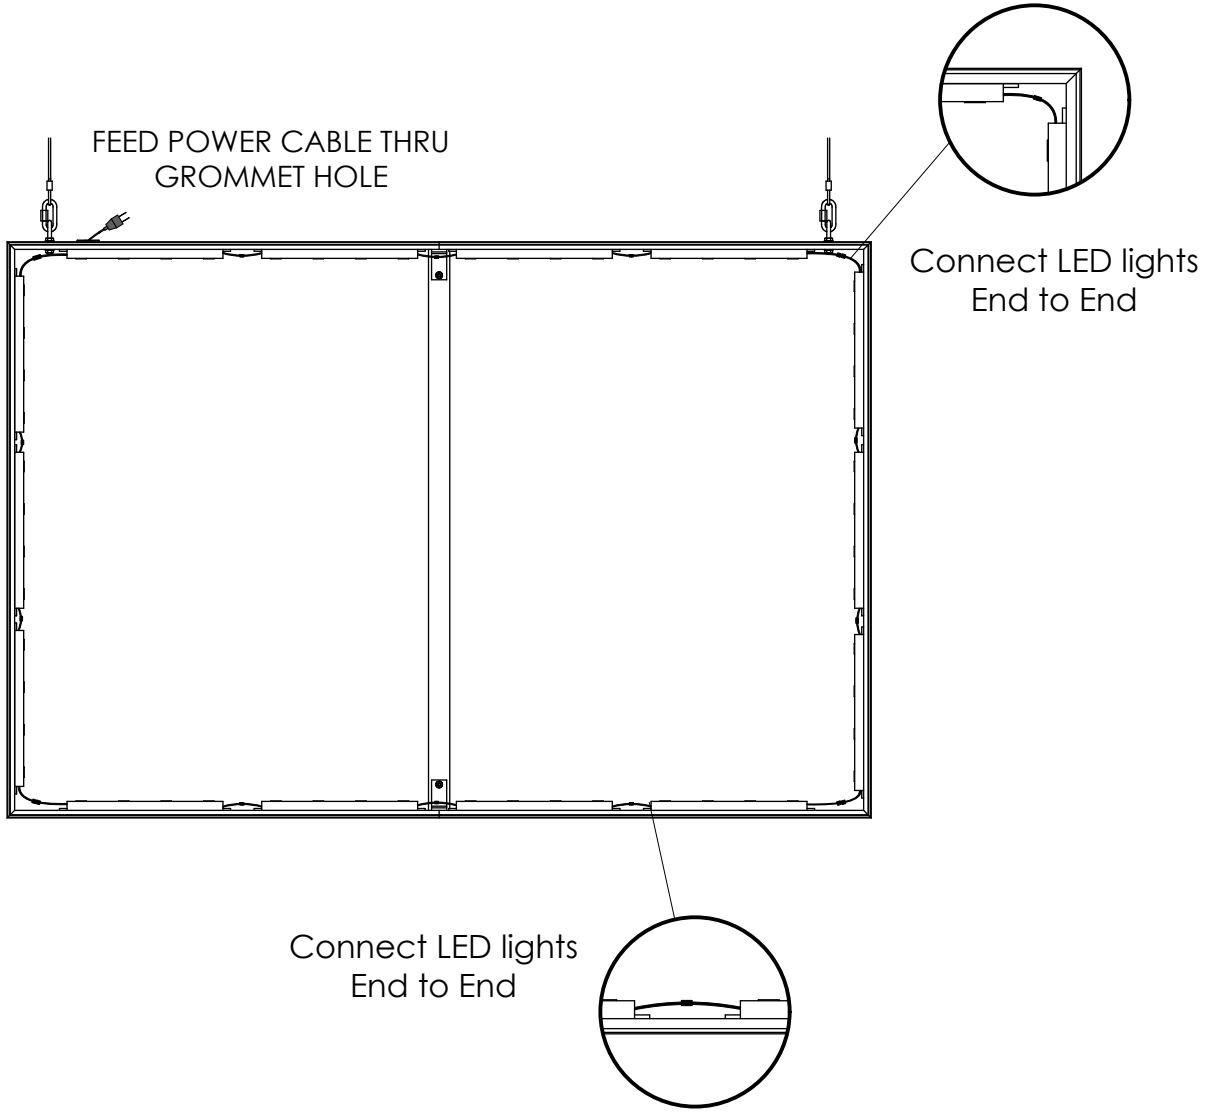

| QTY | IMAGE | DESCRIPTION |
|---|---|---|
| 8 |  | CB10 90 DEGREE CONNECTOR |
| 4 |  | JOINER BAR (OLD STYLE) |
| 2 |  | 1219MM (47.99in) LENGTH OF 360 BLAZE EXTRUSION-WITH MITRE CUT FOR CB10s ONE END-IB2 LOCK HOLES ONE END |
| 2 |  | 914MM (35.98in) LENGTH OF 360 BLAZE EXTRUSION-WITH MITRE CUT BOTH ENDS FOR CB10s |
| 1 |  | 1219MM (47.99in) LENGTH OF 360 BLAZE EXTRUSION-WITH MITRE CUT FOR CB10s ONE END-IB2 LOCK HOLES ONE END-WITH GROMMET HOLE- 171MM FROM LEFT/BOTTOM END-WITH 9MM DIA THRU HOLES 90MM FROM LEFT END-WITH 9MM DIA THRU HOLES 812MM FROM LEFT END |
| 1 | | 8FT POWER CORD FOR LED-EV LIGHTS |
| 1 |  | 882MM LENGTH OF PH EXTRUSION-WITH CAM LOCKS BOTH ENDS |
| 4 |  | WHITE BLAZE SPREADER BRACKET |
| 2 |  | BLAZE HANGING LIGHTBOX INTERNAL BRACKETS WITH NUTS, SCREWS & WASHERS. |
| 4 |  | BLAZE U-BOLT HANGING ASSEMBLY WITH NUTS & WASHERS |
| 4 |  | 5/16 Oval Threaded Connector |
| 4 | | 1/8" x 48" (4 ft.) hanging structure cable |
| 1 |  | 1219MM (47.99in) LENGTH OF 360 BLAZE EXTRUSION-WITH MITRE CUT FOR CB10s ONE END-IB2 LOCK HOLES ONE END-WITH 9MM DIA THRU HOLES 90MM FROM LEFT END-WITH 9MM DIA THRU HOLES 812MM FROM LEFT END |
| 16 |  | LIGHT BAR (SEG), AC POWER, 6000K, 14" L |


# SETUP INSTRUCTIONS

CENTER CONNECTIONS

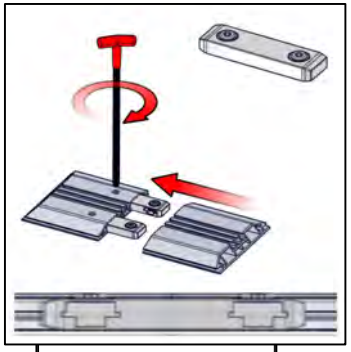


U BOLT ATTACHMENT




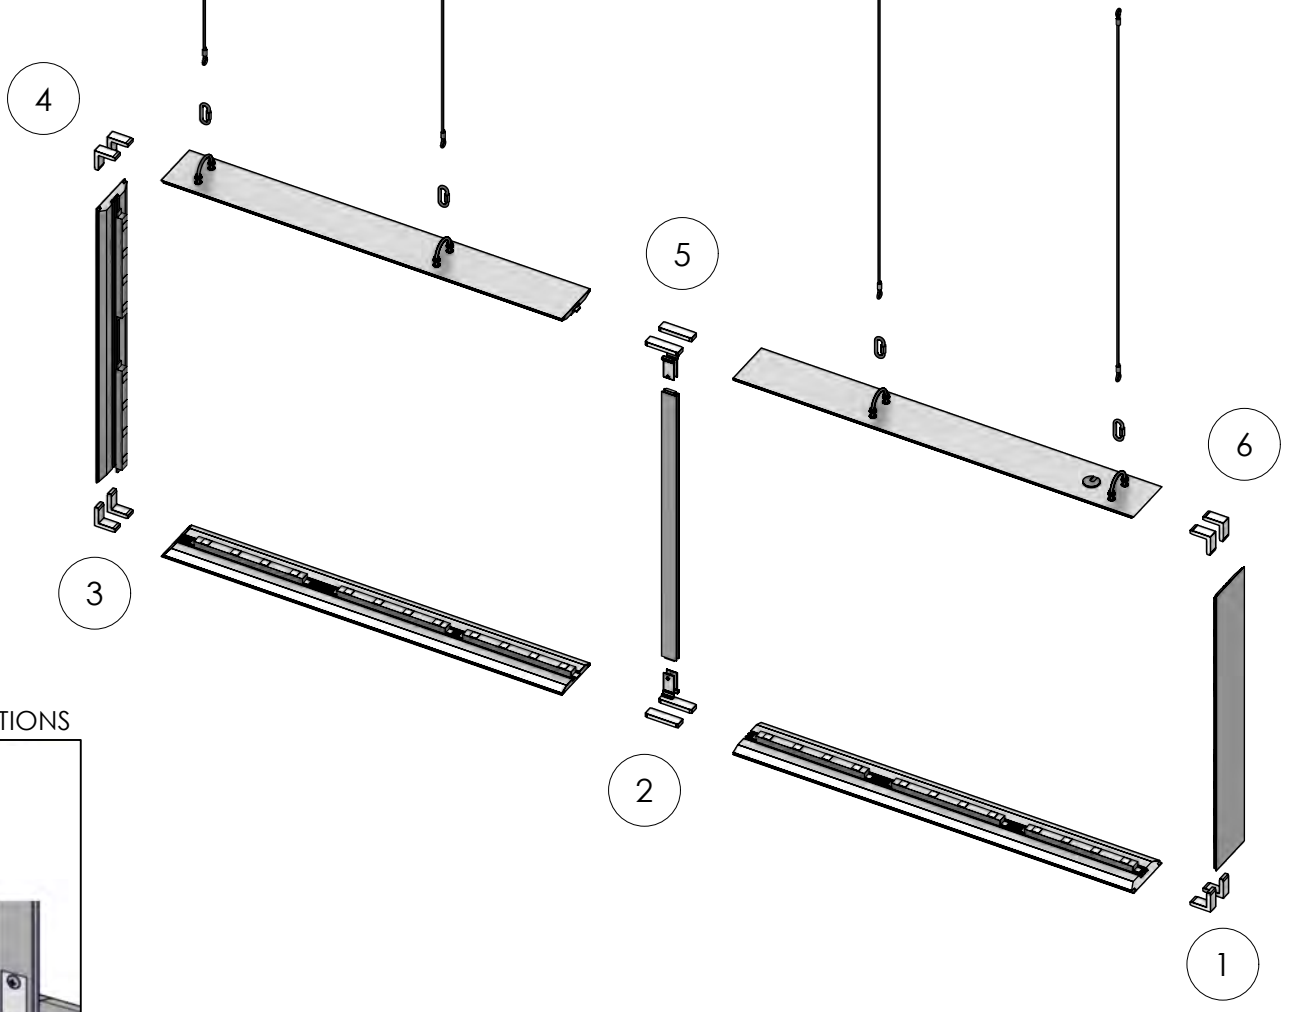


CORNER CONNECTIONS

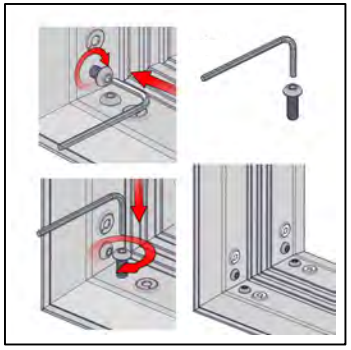


VERTICAL CONNECTIONS

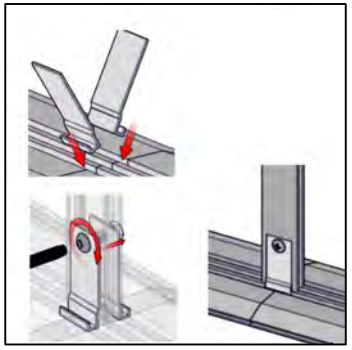

ASSEMBLE FRAME


| QTY | IMAGE | DESCRIPTION |
|---|---|---|
| 1 | | GRAPHIC (A1) (99.88 w X 39.88 h total size ) 95.88 w X 35.88 h finish size, UV/LED print on Backlit Intensity, single sided, sewn with silicone beading around perimeter & pull tab in bottom right corner |
| 1 | | GRAPHIC (A2) (99.88 w X 39.88 h total size ) 95.88 w X 35.88 h finish size, UV/LED print on Backlit Intensity, single sided, sewn with silicone beading around perimeter & pull tab in bottom right corner |

PRESS CORNERS IN

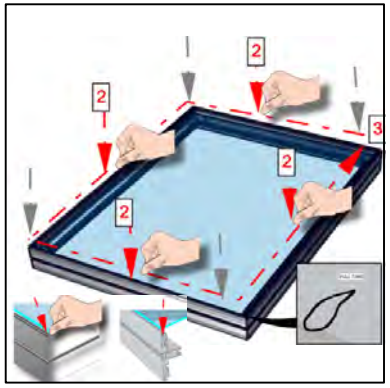


THEN PRESS ALONG THE PERIMETER EDGE

# SETUP INSTRUCTIONS

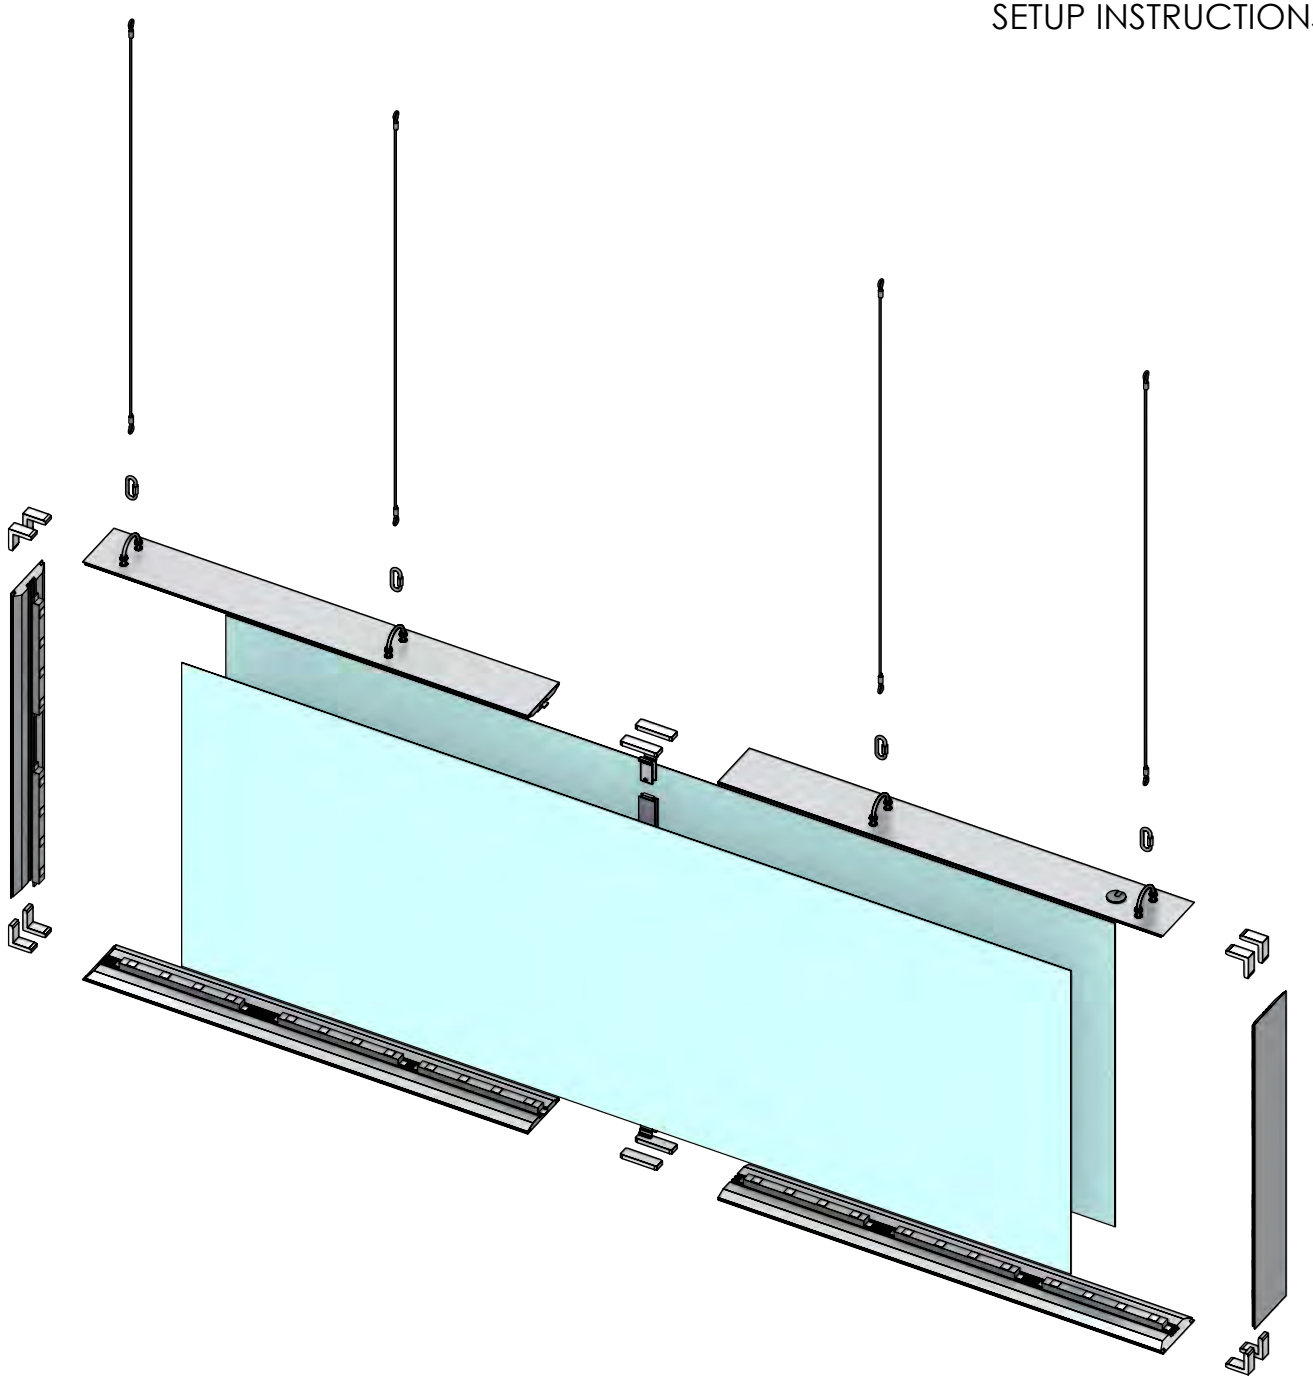

ADD GRAPHICS